


# Vibro - S

The **Vibro-S** is a general purpose vibration control pad which is ideal for use in many industrial applications.

Vibro-S is formulated to have high endurance even in the most demanding of applications. Conforming to ASTM D297 and ASTM D2240, the Vibro-S is manufactured from high quality cork and Nitrile. Meaning, that even in the presence of oils, fuels or grease, the Vibro-S will not deteriorate.

Specifically designed to isolate the transmission of vibration, Vibro-S is ideal for use in applications such as:

1. HVAC ventilation equipment- AHU, CHRV, Chillers.
2. Industrial Machinery- Saws, Lathes, Drills, Guillotines, Presses, etc.
3. Power Generation Systems (Gen Sets).
4. Pumps and Compressors.

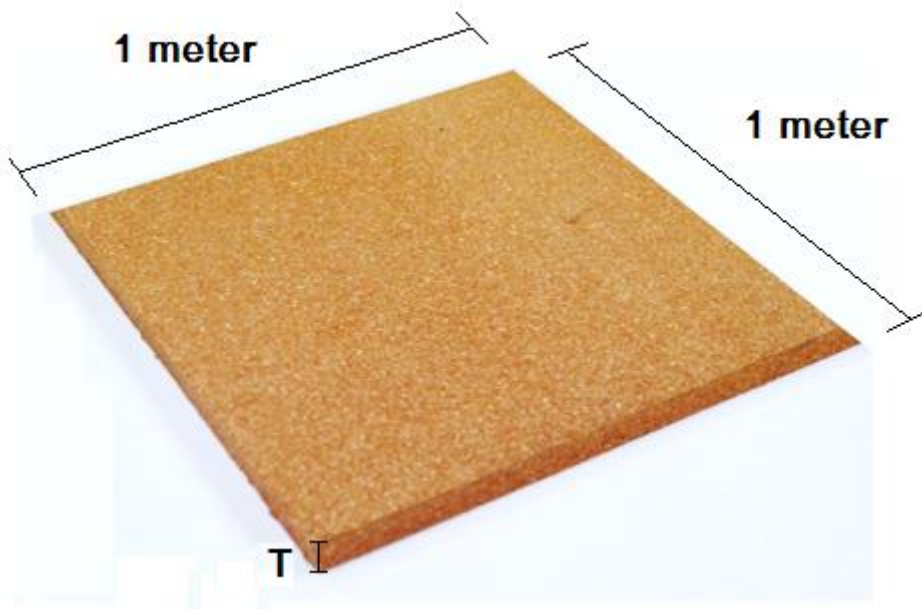

PART NUMBER	T= Thickness	650 RPM	1000 RPM	1500 RPM +
VIBRO- S8	8mm	NA	47%	82%
VIBRO- S10	10mm	NA	57%	85%
VIBRO- S12	12mm	NA	66%	87%
VIBRO- S20	20mm	26%	78%	91%
VIBRO- S25	25mm	45%	82%	93%
VIBRO- S40	40mm	73%	90%	93%
VIBRO- S50	50mm	78%	92%	96%

**Max Load per pad:** 150 tonnes (load to be distributed over whole pad)

Also suitable for Punches & Presses

DATA SHEET VIBRO-S 2014.

This information is for guidance only. Customers are recommended to contact us for further technical information on products and applications. We reserve the right to alter specifications or withdraw products without notice.